



Basic
Roller blind
tube \varnothing 25 mm

Production specification

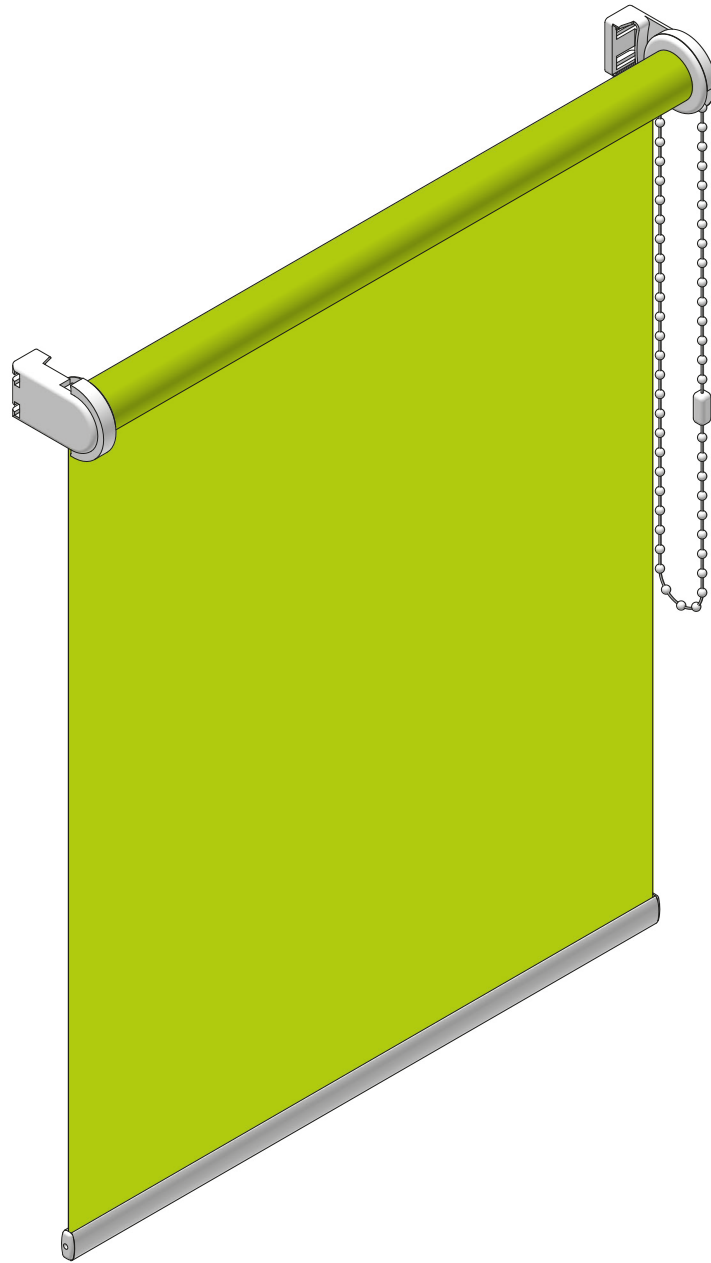


STANDARD

CONTROL INSTALLATION OPTIONS



Control on the left side





Control on the right side

ALLOWED DIMENSIONS OF THE ROLLER BLINDS

	width cm	height cm	recommended roller blind area
min.	40	50	0,25 m ²
max.*	180	250	4,5 m ²

*) The allowed size of the roller blind may vary depending on the available fabric roller width and and fabric grammage

DIMENSION OF THE ROLLER BLIND

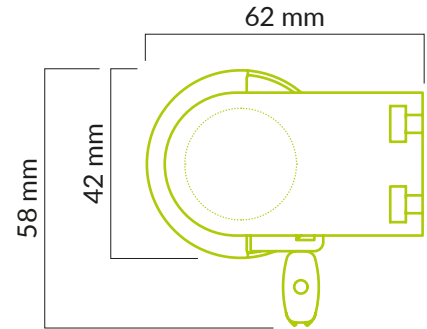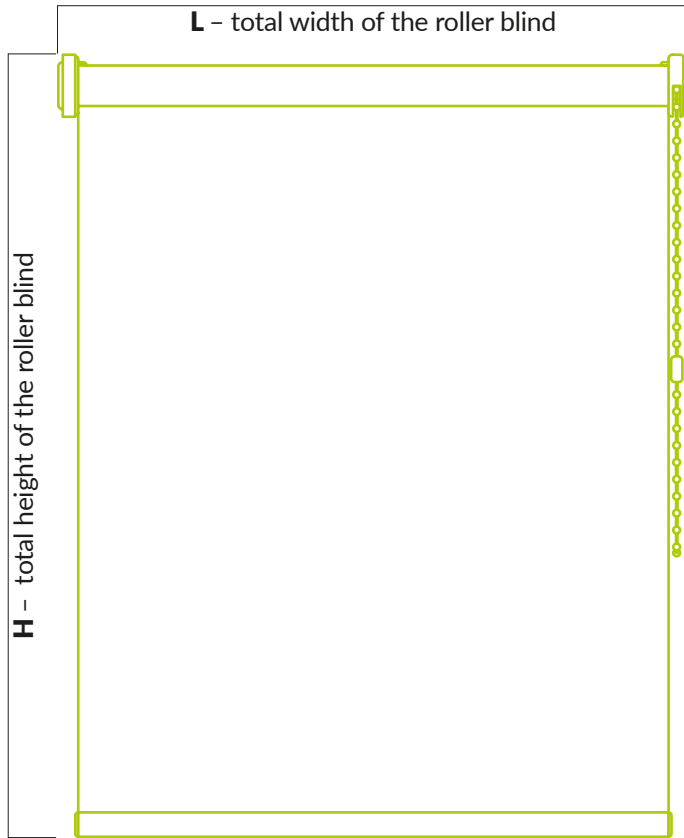

SHORTENING


	tube $\varnothing 25$	dead weight rail	Fabric	
			width	height
Basic	L -28 mm	L -30 mm	L -30 mm	H +100 mm

ROLLER BLIND MOUNTING

The Basic system roller blind can be mounted:

- directly to the window recess, ceiling or wall.
- directly with screws to the window glazing bead.

Hole arrangement assembly

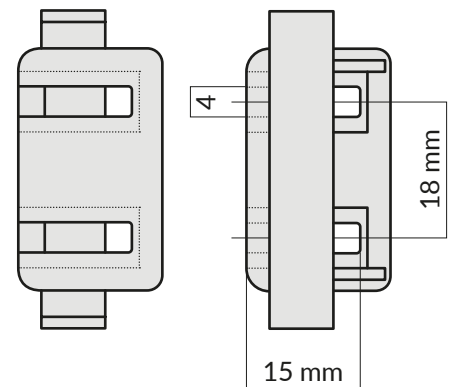



TOLERANCE STANDARDS OF SHAPE AND SIZE OF ROLLER BLINDS

LATERAL CAMBER

the degree of deflection between fabric ends.

Maximum allowable camber

maximum value of camber [mm] ≤ 0.04 of the fabric width

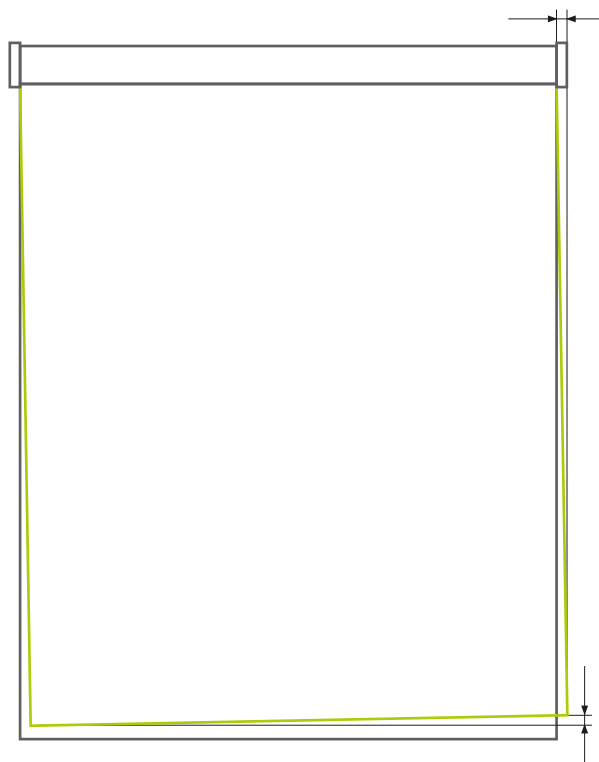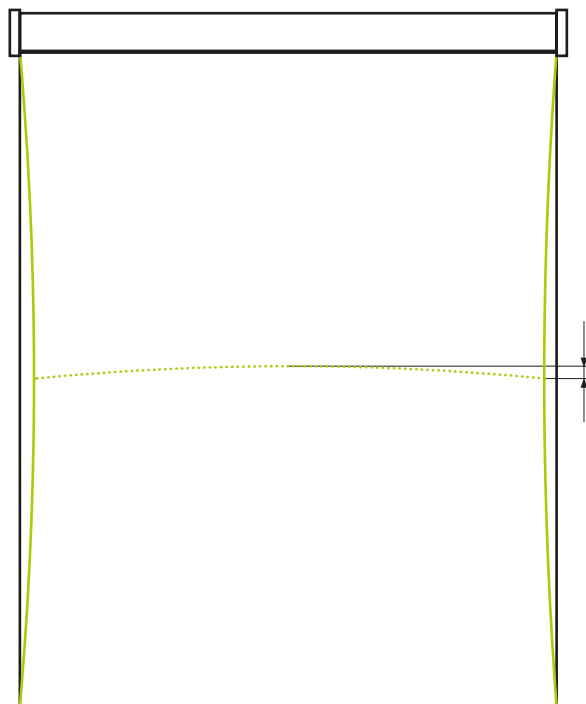

DEVIATION FROM HORIZONTAL / VERTICAL

Allowable deviation

	below 2,5 m	over 2,5 m
Width	5 mm	8 mm
Height	5 mm	8 mm

DIMENSIONAL TOLERANCE

assuming the use of the roller blind in optimal conditions, the dimensional tolerance may change in relation to the height +/- 3% and the width +/- 0.5%.