


# **Comfort Plus** **Comfort Plus Smart**


Roller blind  
tube  $\varnothing$ 38 mm

Production specification


## REALIZATION

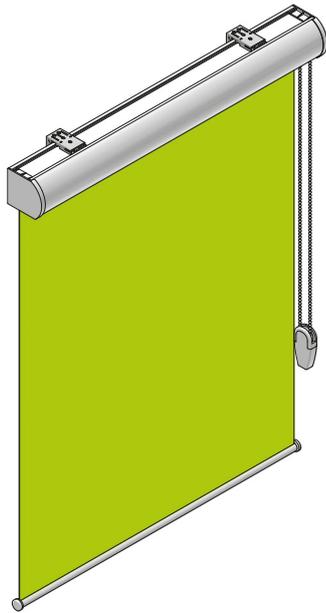


**STANDARD**

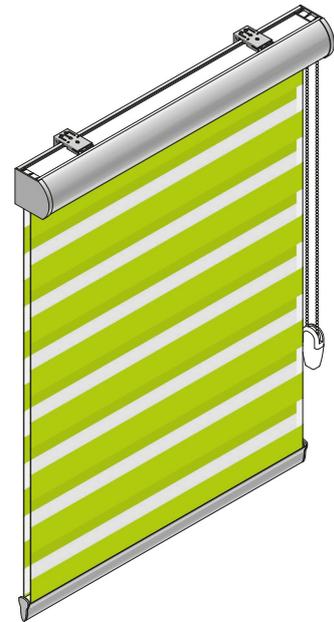

**SUNSTRIPE**

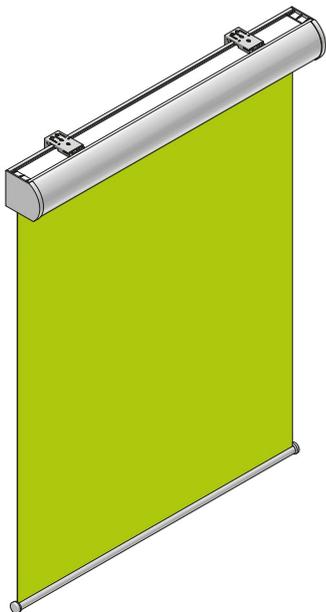


**SMART - electric roller blind**

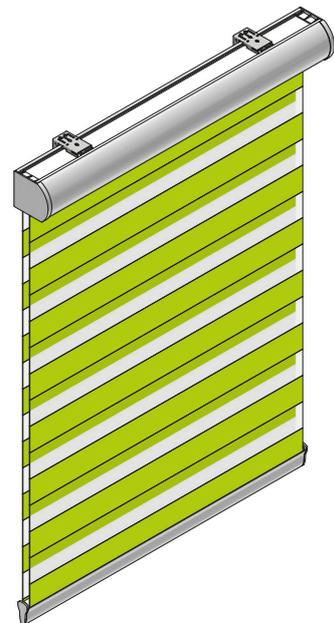


**SMART SUNSTRIPE - electric roller blind**

## CONTROL INSTALLATION OPTIONS

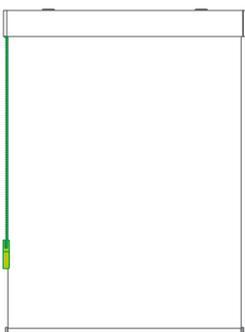

Control  
on the left side

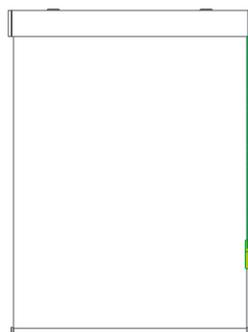

Control  
on the right side



## ALLOWED DIMENSIONS OF THE ROLLER BLINDS

	width cm	height cm	recommended roller blind area
min.	50 <sup>2</sup>	50	0,55 m <sup>2</sup>
max. standard <sup>1</sup>	240	250	6 m <sup>2</sup>
max. sunstripe <sup>1</sup>	230	210	4,83 m <sup>2</sup>


<sup>1</sup>) The allowable size of the roller blind may vary depending on the available fabric roller width and fabric grammage. The weight of the fabric with bottom weight in the SMART version is not should exceed 4 kg.

<sup>2</sup>) The minimum width in the SMART version is 55 cm.

# DIMENSION OF THE ROLLER BLIND

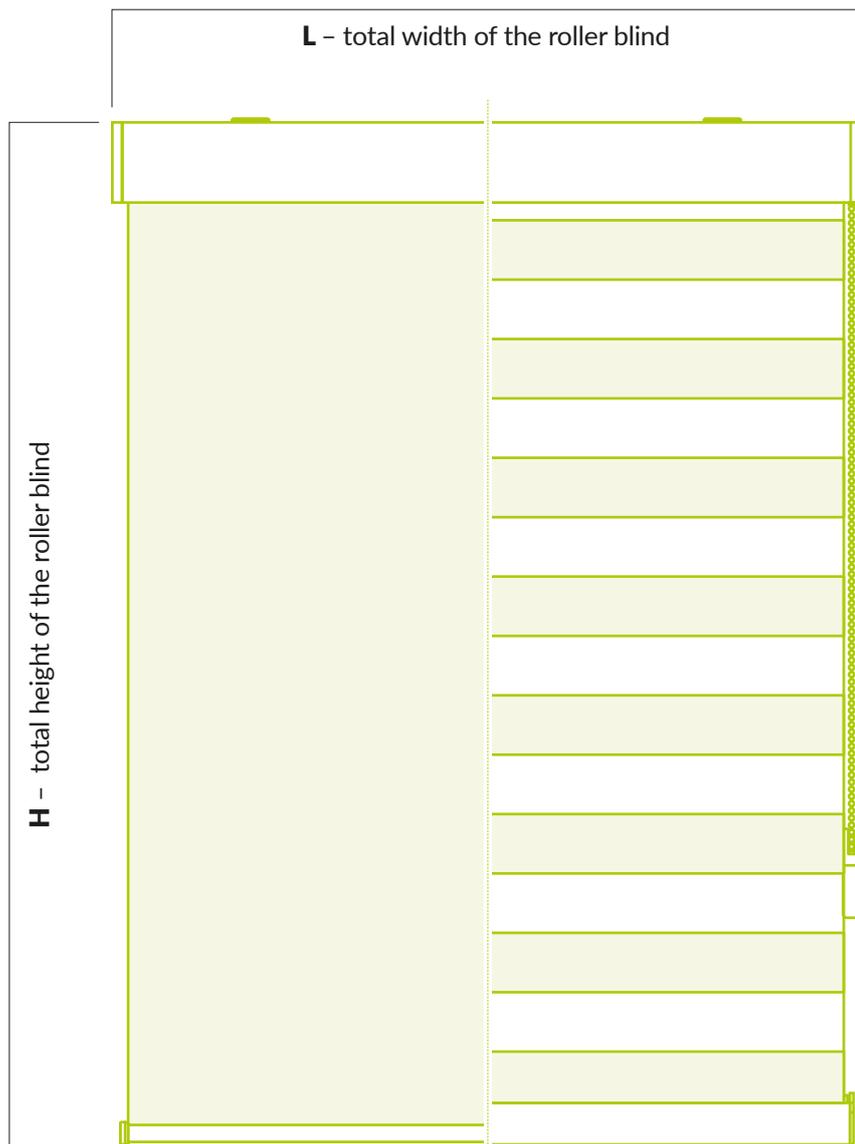

standard

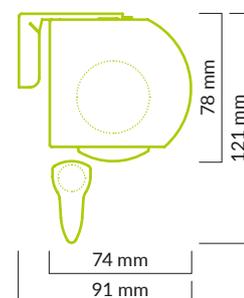

sunstripe

## SHORTENING


	Cover Cassette	Tube Ø38	Dead weight rail	Weight tube	Fabric	
					width	height
<b>Comfort Plus Standard</b> <b>Comfort Plus Smart Standard</b>	L -5 mm	L -21 mm	L -19 mm	L -18 mm	L -25 mm	H +200mm
<b>Comfort Plus Sunstripe</b> <b>Comfort Plus Smart Snunstripe</b>	L -5 mm	L -21 mm	L -14 mm	L -18 mm	L -25 mm	2 x H +200mm

## ROLLER BLIND MOUNTING


The installation brackets to enable mounting the roller blind to the wall or ceiling. The number of brackets depends from the width of the roller blind.

Width of the roller blind [cm]	recommended number of mounting brackets
< 140	2
140 ÷ 240	3

## AVAILABLE BRACKETS



**29-3823-K0-W0**  
Spring snap for cassette, ceiling



**29-3824-K0-W0**  
Spring snap for cassette, wall and ceiling


# TOLERANCE STANDARDS OF SHAPE AND SIZE OF ROLLER BLINDS

## LATERAL CAMBER

the degree of deflection between fabric ends.

### Maximum allowable camber

maximum value of camber [mm]  $\leq 0.04$  of the fabric width

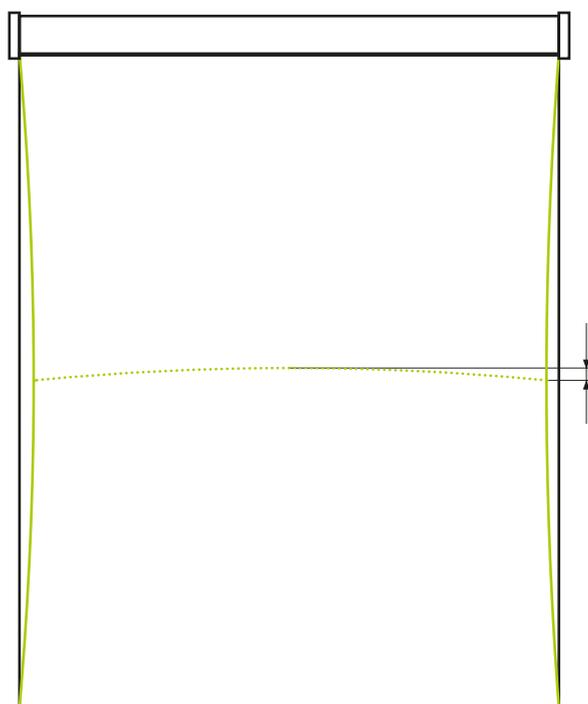

## DEVIATION FROM HORIZONTAL / VERTICAL

### Allowable deviation

	below 2,5 m	over 2,5 m
Width	5 mm	8 mm
Height	5 mm	8 mm

## DIMENSIONAL TOLERANCE

assuming the use of the roller blind in optimal conditions, the dimensional tolerance may change in relation to the height +/- 3% and the width +/- 0.5%.

