


# Diamond 25

Roller blind  
tube  $\varnothing$ 25 mm

Production specification

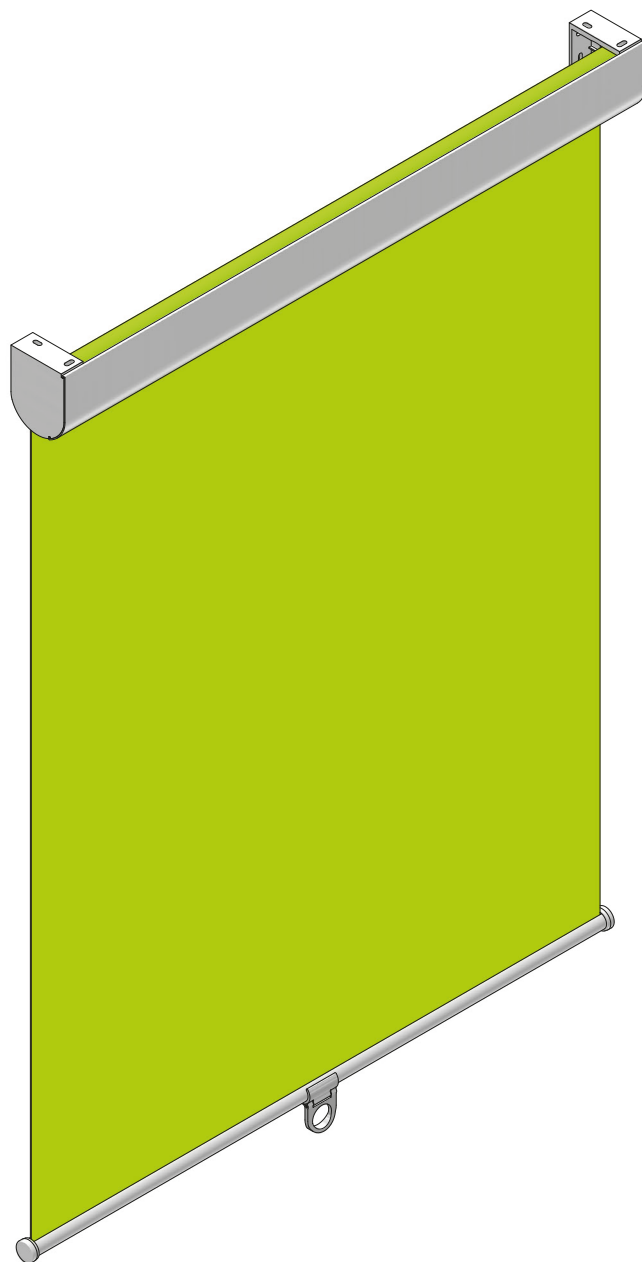

STANDARD

ALLOWED DIMENSIONS OF THE ROLLER BLINDS


	width cm	height cm	recommended roller blind area
min.	70	90	0,63 m <sup>2</sup>
max.*	180	240	4,32 m <sup>2</sup>

\*) The allowed size of the roller blind may vary depending on the available fabric roller width and and fabric grammage.

SELECTION OF SPRING  
TO THE SIZE OF THE ROLLER BLIND

roller blind width cm	recommended spring with a fabric weight of 100-250 g
70 -100	Spring + controller DC25 white 28-2516-K0-W1
101-160	Spring + controller DC25 grey 28-2516-K0-W2
161-180	Spring + controller DC25 black 28-2516-K0-W3

# DIMENSION OF THE ROLLER BLIND

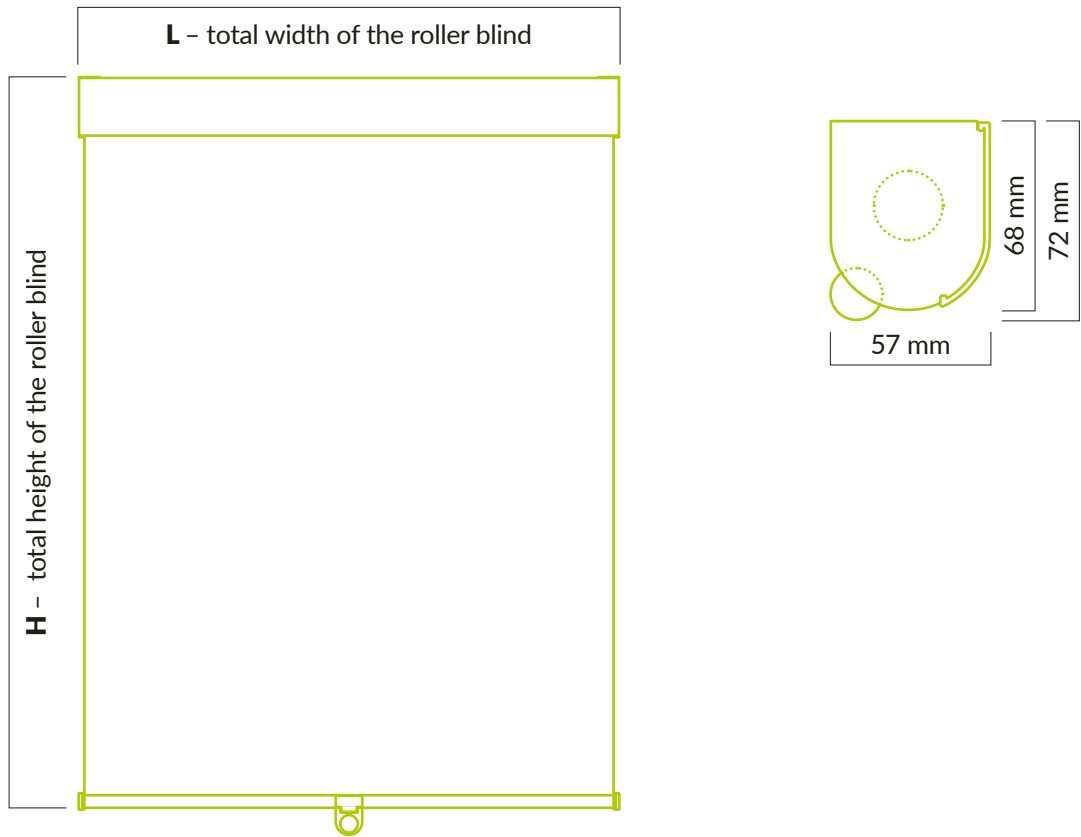


## SHORTENING

	Cover Cassette	Tube Ø25	Dead weight rail	Fabric	
				width	height
<b>Diamond 25</b>	<b>L</b>	<b>L -21 mm</b>	<b>L -19 mm</b>	<b>L -26 mm</b>	<b>H +200mm</b>

## ROLLER BLIND MOUNTING

The Diamond 25 roller blinds system can be attached directly to the recess window, ceiling or wall.

Hole arrangement assembly

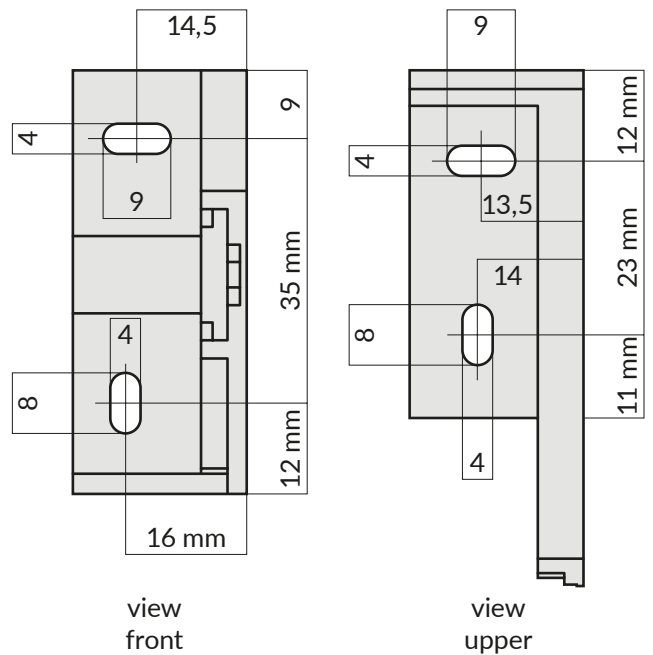



## TOLERANCE STANDARDS OF SHAPE AND SIZE OF ROLLER BLINDS

### LATERAL CAMBER

the degree of deflection between fabric ends.

#### Maximum allowable camber

maximum value of camber [mm]  $\leq 0.04$  of the fabric width

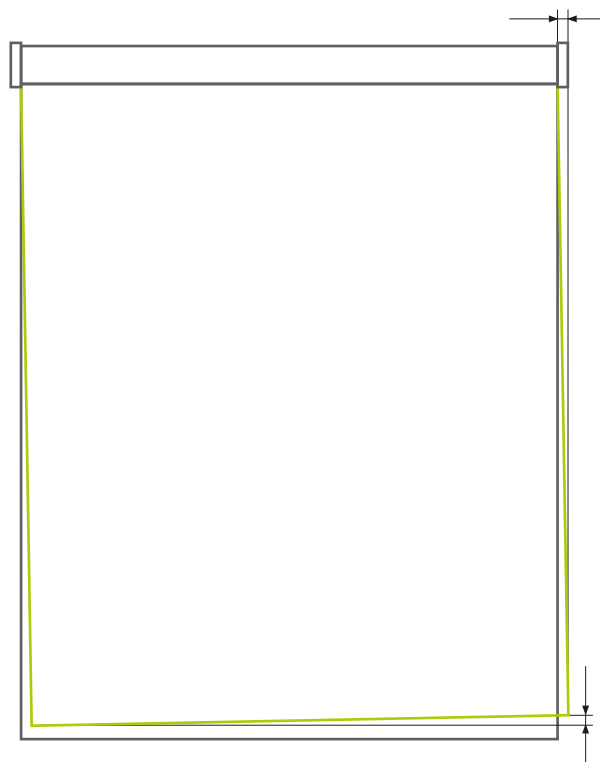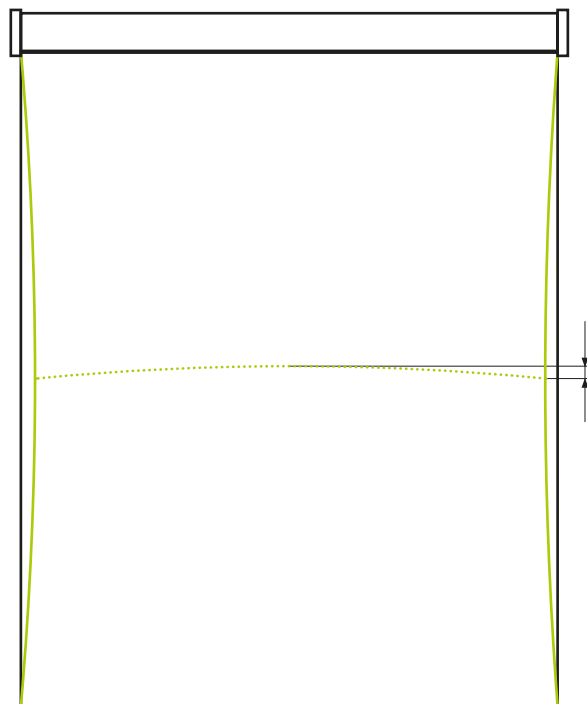

### DEVIATION FROM HORIZONTAL / VERTICAL

#### Allowable deviation

	below 2,5 m	over 2,5 m
Width	5 mm	8 mm
Height	5 mm	8 mm

### DIMENSIONAL TOLERANCE

assuming the use of the roller blind in optimal conditions, the dimensional tolerance may change in relation to the height +/- 3% and the width +/- 0.5%.