


Diamond 38

Roller blind
tube \varnothing 38 mm

Production specification

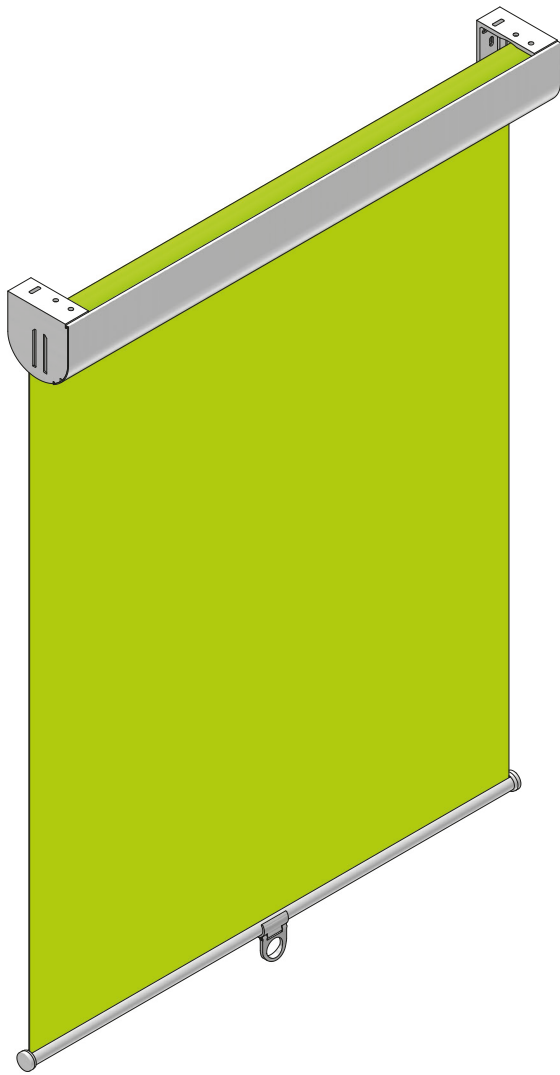

STANDARD

ALLOWED DIMENSIONS OF THE ROLLER BLINDS


	width cm	height cm	recommended roller blind area
min.	70	90	0,63 m ²
max.*	220	250	5,5 m ²

*) The allowed size of the roller blind may vary depending on the available fabric roller width and fabric grammage

SELECTION OF SPRING TO THE SIZE OF THE ROLLER BLIND

width of the roller blind [cm]	recommended spring	
	fabric weight <420 g	fabric weight of 420-520 g
70 -100	Spring + controller DC38 white 28-3826-K9000-W2	Spring + controller DC38 grey 28-3826-K4417-W2
101-130	Spring + controller DC38 white 28-3826-K9000-W2	Spring + controller DC38 black 28-3826-K0164-W2
131-140	Spring + controller DC38 grey 28-3826-K4417-W2	Spring + controller DC38 black 28-3826-K0164-W2
141-160	Spring + controller DC38 grey 28-3826-K4417-W2	Spring + controller DC38 blue 28-3826-K0517-W3
161-200	Spring + controller DC38 black 28-2516-K0-W3	
201-220	Spring + controller DC38 blue 28-3826-K0517-W3	

DIMENSION OF THE ROLLER BLIND

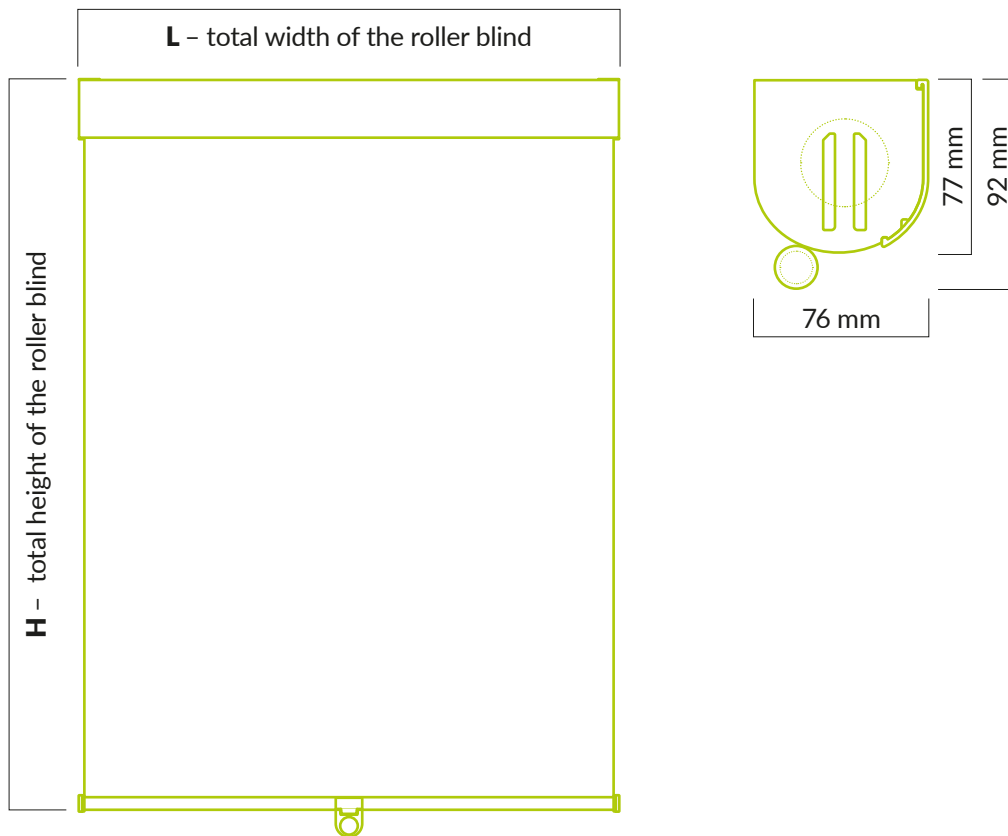


SHORTENING

	Cover Cassette	Tube $\varnothing 38$	Dead weight rail	Fabric	
				width	height
Diamond 38	L	L - 23 mm	L - 19 mm	L - 26 mm	H + 200mm

ROLLER BLIND MOUNTING

The Diamond 38 roller blinds system can be attached directly to the recess window, ceiling or wall.

Hole arrangement assembly

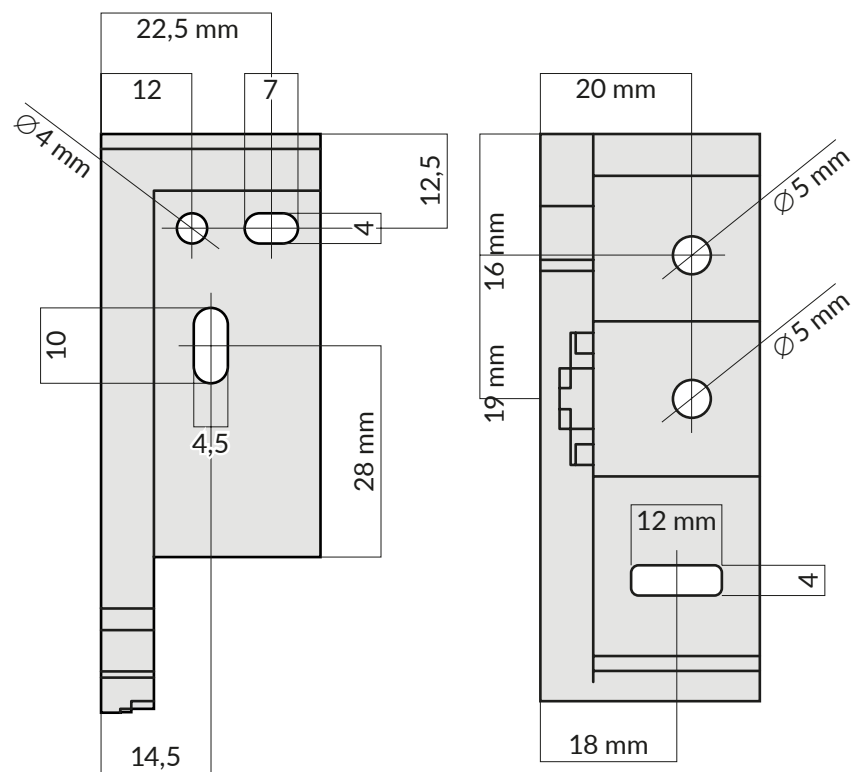

widok od przodu

widok z góry


TOLERANCE STANDARDS OF SHAPE AND SIZE OF ROLLER BLINDS

LATERAL CAMBER

the degree of deflection between fabric ends.

Maximum allowable camber

maximum value of camber [mm] ≤ 0.04 of the fabric width

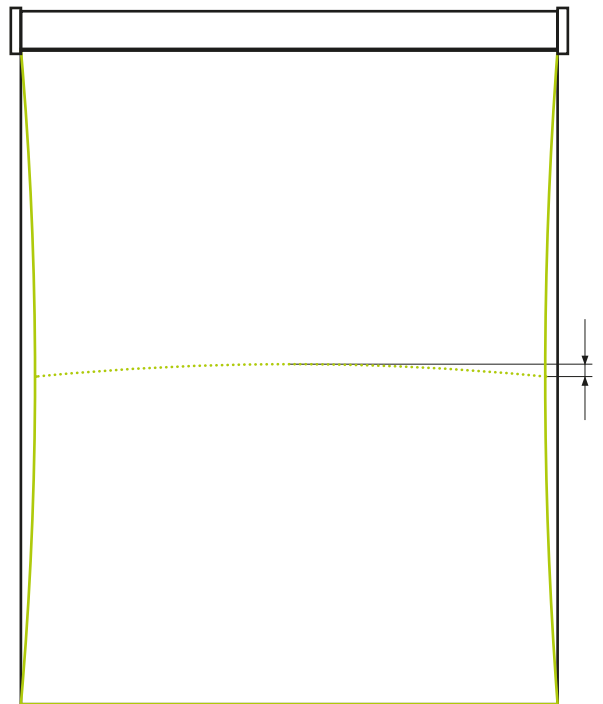

DEVIATION FROM HORIZONTAL / VERTICAL

Allowable deviation

	below 2,5 m	over 2,5 m
Width	5 mm	8 mm
Height	5 mm	8 mm

DIMENSIONAL TOLERANCE

assuming the use of the roller blind in optimal conditions, the dimensional tolerance may change in relation to the height +/- 3% and the width +/- 0.5%.

